

5 MP IR VARIFOCAL BULLET NETWORK CAMERA


SECURING YOUR LIFE

TB-IB1-N51PVI

Sản xuất lắp ráp tại Nhà máy E111 - BCA

Product Image Dimensions

- Dimensions: Ø 144 mm × 333 mm
- Weight: Approx. 2576 g With package
- Material: Front cover metal, back cover metal
- Accessory: Adapter and junction box (included)
- Operating Conditions: -30 °C to +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)

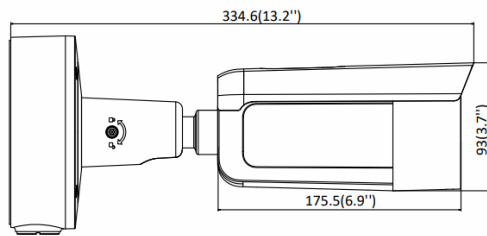

Accessories



Vertical Pole Mount



Corner Mount



Ceiling mount

Features

- 1/2.8" Progressive Scan CMOS
- 2592 × 1944 @30fps at 60 Hz
- 2.7 to 13.5 mm varifocal lens
- Color: Color: 0.003 Lux @ (F1.4, AGC ON), B/W: 0 Lux with IR
- H.265+, H.265, H.264+, H.264
- Three streams
- 120dB WDR
- BLC/3D DNR/ROI/HLC
- P67, IK10
- Built-in micro SD/SDHC/SDXC card slot, up to 256 GB
- 3-Axis adjustment

Specifications

CAMERA

Image Sensor	1/2.8" progressive scan CMOS
Illumination	Color: 0.003 Lux @ (F1.4, AGC ON), B/W: 0 Lux with
Color	IR
Shutter Speed	1/3 s to 1/100,000 s
Day & Night	IR Cut Filter
Angle	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
Adjustment	
S/N Ratio	More than 50dB
WDR	120dB

CAMERA FEATURES

Max. IR LEDs	Up to 60 m
Length	
Day/Night	Auto(ICR) / Color / B/W
Backlight	BLC / HLC / WDR(120dB)/ 3D DNR
Compensation	
White Balance	Auto/Sunny/Night/Outdoor/Customized
Gain Control	Auto/Manual
Noise	3D
Reduction	
Privacy	Up to 4 areas
Masking	

LENS

Iris Type	Auto-iris
Lens Type	Varifocal lens 2.7 – 13.5 mm
Aperture	2.7 to 13.5 mm: F1.4

IMAGE

Main stream	50 Hz: 25 fps (2592 × 1944, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 24 fps (2592 × 1944) 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)
Audio	G.711alaw/G.722.1/G.726/MP2L2/PCM/MP3/ACC
Compression	
Video	Main Stream: H.265+/H.265/H.264+/H.264
Compression	Sub-Stream: H.265/H.264/MJPEG Third Stream: H.265/H.264/MJPE
Image Setting	2592 × 1944 Max
Video Bit Rate	32 Kbps to 16 Mbps

INTERFACE

Alarm	1 input, 1 output (max. 24 VDC/24 VAC, 1 A)
Audio	1 input (line in); 1 output (line out)
Ethernet	1 RJ45 10 M/100 M
Interface	
Edge Storage	Built-in micro SD/SDHC/SDXC slot, up to 256 GB
Reset Key	Yes

VCA FEATURES

Smart Event	Line crossing detection, 1 line configurable Intrusion detection, up to 1 region configurable Unattended baggage detection, 1 region configurable Object removal detection, 1 region configurable Face detection: detects faces Scene change detection Audio exception detection Motion detection, video tampering alarm, exception (network disconnected, IP address conflict, illegal login, HDD full, HDD error)
Event	
Detection	

NETWORK

Network	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, DHCP, PPPoE, UDP, IGMP, ICMP, Bonjour
Protocols	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS 1.2, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, TLS1.2, AES Video Encryption 128 bits.
Security	
Web	
Language	English, Russian, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian ...

GENERAL

Power	12 VDC ± 25%, 1.08 A, max. 13 W, two-core terminal
Supply	block PoE: 802.3at, Class 4, 42.5 V to 57 V, 0.36 A to 0.27 A, max. 15 W



E111 FACTORY – THANH BINH BCA CO., LTD.

Industrial Zone – Lai Yen – Hoai Duc – Ha Noi

Tel: 1800.28.22.29 | Email : sale@tbvision.net | Website : tbvision.net |

