


# CAMERA CHO HỆ THỐNG GHI ÂM HOẶC GHI HÌNH CÓ ÂM THANH CỐ ĐỊNH

VVIP-2HDIR28

Sản xuất lắp ráp tại Nhà máy E111 - BCA

## Product Image Dimensions

- Kích thước: 78,8 × 81,6 × 64 mm
- Trọng lượng xấp xỉ. 330 g
- Chất liệu: Hợp kim nhôm
- Phụ kiện: Adaptor và chân đế (đi kèm)
- Điều kiện hoạt động: -30 °C đến +65 °C (-22 °F đến +145 °F), Độ ẩm từ 95% trở xuống (không ngưng tụ)

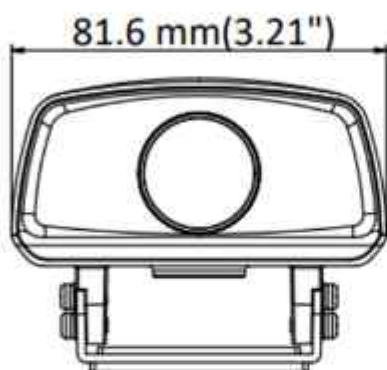

## Features

- ✓ Cảm biến hình ảnh 1/2.8" Progressive Scan CMOS
- ✓ Ống kính 2.8 mm Lens
- ✓ Độ phân giải 1080P (1920x1080)
- ✓ H.265, H.265+, H.264+, H.264
- ✓ 120dB WDR
- ✓ IP67, IK10
- ✓ Đèn hồng ngoại: 10m
- ✓ Xử lý nâng cao chất lượng hình ảnh: BLC, 3D DNR, HLC, defog, EIS, EXIR

CAMERA	
Image Sensor	1/2.8" Progressive Scan CMOS
Illumination Color	Color: 0.005 lux @(F1.2 AGC ON) B/W: 0.006 lux @(F1.2 AGC ON), 0 lux with IR
Shutter Speed	1/3 s to 1/100,000 s
Day & Night	IR Cut Filter
Digital Noise Reduction	3D DNR
S/N Ratio	More than 50dB
WDR	120dB
CAMERA FEATURES	
Max. IR LEDs Length	Up to 30 m
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC / HLC /WDR(120dB)/ 3D DNR / EXIR
White Balance	Auto/Sunny/Night/Outdoor/Customized
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
LENS	
Focal length	2.8 mm (Horizontal FOV 126°)
Aperture	F1.6
Lens Mount	M12
Focus	Auto focus
IMAGE	
Video Compression	1920 × 1080
Main stream	50Hz: 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 60 fps (1920 × 1080, 1280 × 960, 1280 × 720)
Audio Compression	G.711alaw/G.722.1/G.726/MP2L2/PCM/MP3
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.264/MJPEG Third Stream: H.265/H.264/MJPE
Stream	50Hz: 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 60 fps (1920 × 1080, 1280 × 960, 1280 × 720)
Image Setting	1920 × 1080
Video Bit Rate	32 Kbps to 16 Mbps

INTERFACE	
Ethernet Interface	1 RJ45 10 M/100 M
Memory card slot	N/A
VCA FEATURES	
Smart Event	Line crossing detection, intrusion detection, region entrance detection, region exit detection, unattended baggage detection, object removal detection
Exception	Scene change detection, defocus detection
NETWORK	
Network Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, DHCP, PPPoE, UDP, IGMP, ICMP, Bonjour
Security	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP™, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, AES Video Encryption 128 bits.
Web Language	English, Russian, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian ...
GENERAL	
Power Supply	12 VDC/2A, PoE (802.3af, 36V to 57V)
Power Consumption	PoE: 0.20 A to 0.30 A, max: 7.5 W DC: 0.2 A to 0.8 A, max: 5.2 W

\*All pictures and specifications are for reference only and are subject to change without prior notice.



**E111 FACTORY – THANH BINH BCA CO., LTD.**

Industrial Zone – Lai Yen – Hoai Duc – Ha Noi

Hotline: 1800.282229 | Email : [info@tbvision.com.vn](mailto:info@tbvision.com.vn) | Website : [tbvision.com.vn](http://tbvision.com.vn) |

