THIẾT BỊ NHẬN DIỆN KHUÔN MẶT

Tích hợp tính năng nhận diện khuôn mặt sử dụng công nghệ Al...

Sản xuất tại Nhà máy E111 - BCA

MODEL: TB-FT98-A8DP


Product Image Dimensions


- ✓ Power supply: 12 to 24 VDC, 3 A, Standard PoE
- ✓ Dimensions: 127.3 mm × 232.1 mm × 23.5 mm
- ✓ Working temperature: -30 °C to 60 °C



Features

- √ 8-inch touch screen with bezel-less design
- ✓ Presents card on the screen to authenticate
- ✓ Face recognition distance: 0.3 m to 3 m, duration <
 0.2 s/User, accuracy rate ≥ 99%
- √ 100,000 face capacity, 100,000 card capacity (Felica, DESfire, M1), and 150,000 event capacity
- ✓ Supports ISAPI, Wiegand, RS-485, TCP/IP, and PoE
- ✓ Two-way audio with indoor station and main station
- ✓ Configuration via the web client and mobile client
- ✓ Customizes attendance status name
- ✓ Biometric recognition products are not 100% applicable to anti-spoofing environments. If you require a higher security level, use multiple authentication modes.



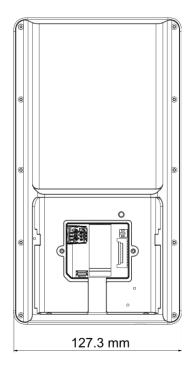





Industrial Zone - Lai Yen - Hoai Duc - Ha Noi



Specifications

System	
Operating system	Linux
Display	
Screen size	8-inch
Operation method	Capacitive touch screen
Resolution	1280 × 800
Video	
Lens	× 2
Resolution	2 MP
Video standard	PAL (Default) and NTSC
FOV	HFOV= 88°; VFOV= 44°; DFOV=108°
Network	
Wired network	10 M/100 M/1000 M self-adaptive
Interface	
Network interface	1
Lock control	1
Exit button	1
Door contact input	1
Alarm input	2
Alarm output	1
TAMPER	1
RS-485	1
Wiegand	1
USB	1
Capacity	
Face capacity	100000
Card capacity	100000
Event capacity	150000
Authentication	
Face recognition distance	0.3 to 3 m
Face recognition accuracy rate	≥99%
Face recognition duration	< 0.2 s
Card type	DESfire card,Felica card,
General	
Power supply	12 to 24 VDC, 3 A, Standard PoE
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0 to 90% (No condensing)
Protective level	IP65
Dimensions	127.3 mm × 232.1 mm × 23.5 mm (5.0" × 9.1" × 0.9")
Power supply method	12 VDC/24 VDC Power Adapter







