

WEB-MANAGEMENT POE SWITCH

SECURING YOUR LIFE

1 1000Base-X SFP Slot and 4 10/100/1000Base PoE Port
and 1 10/100/1000Base-T(X) Ethernet Port


TB-SW0402S-97P

Product Image Dimensions

- Dimensions: 210mm*140mm*45mm
- Weight: 1.6kg with package
- Material: Alumium
- Operating Conditions: -10 ~ +65°C ; 5% ~ 90% RH No condensation

Features

- Support 4*1000M PoE +2*1000M SFP;
- Support WEB management, using self-developed ring network technology, recovery time <20ms.
- Full load maximum 65W.
- DUMP:Common network sharing
- WEB:SMART WEB management

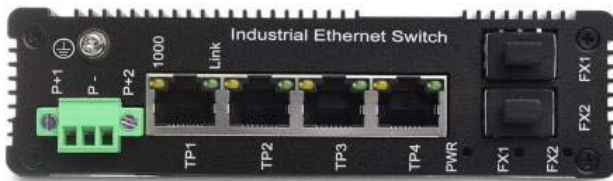

Specifications

Product name	Gigabit Smart Web Poe switch
Fixed port	4 10 / 100 / 1000base TX Poe ports (data / power) 2 x 1000m SFP 1 reset* restore factory configuration button
Port characteristics	10 / 100 / 1000baseT (x) automatic detection, full / half duplex MDI / mdi-x adaptive
Function switch	DUMP : Common network sharing WEB: SMART WEB management
PoE Port	Port 1-4: support ieee803.2af/at, single port, max power 30W
PoE pin	1-4ports : 12+ 36-
Poe total power	≤ 65W
Forwarding mode	Store and forward (full line speed)
backplane bandwidth	12Gbps
Packet forwarding rate	7.2Mpps
MAC address	2K
Cache	2.5M
Network protocol	IEEE 802.3,802.3i,802.3u,802.3x,802.3ab,802.3z; IEEE 802.3af/at



E111 FACTORY – THANH BINH BCA CO., LTD.

Industrial Zone – Lai Yen – Hoai Duc – Ha Noi

Tel: +8443-2181688 | Email : info@tbvision.com.vn | Website : tbvision.com.vn |



Twisted pair transmission	10BASE-T : Cat3,4,5 UTP(≤250 meter); 100BASE-TX : Cat5 or later UTP(100 meter) 1000BASE-TX : Cat6 or later UTP(100 meter)
LED indicator	Power: power indicator 5: (optical port connection indicator) Port: (POE working indicator light orange; Link_ Network connection indicator (green))
Overall power consumption	Full load maximum 65W
Supporting power supply	Built in AC : 100 ~ 240V 50-60Hz 2A
Operating temperature / humidity	-10 ~ +65°C ; 5% ~ 90% RH No condensation
Storage temperature / humidity	-40 ~ +75°C ; 5% ~ 95% RH No condensation
Product size / package size (L * w * h)	210mm*140mm*45mm 270*mm220mm*68mm
Net weight / gross weight (kg)	1.3kg/1.6kg
Installation mode	Desktop type (optional with wall hanging + rack lug accessories)
Lightning protection / protection grade	Port lightning protection: 3KV 8 / 20us; Protection grade: IP30
Software function list	
POE manage	Poe port switch
	Poe protocol type configuration
	Poe port restart
	Poe log function configuration
	Poe port status, current, power and voltage display
Port configuration	Support port on / off
	Support port flow control
	Support port rate control
	Support port name customization
Layer 2 switching	Support port address dynamic learning
	Support port aggregation
	IGMP V1 / V2 support
Port Mirror	Support traffic statistics
	Support local entrance / exit monitoring
	Support loopback detection and loop blocking
VLAN	Quality 802.11Q VLAN、 MTU VLAN、 port VLAN
Service quality (QOS)	Supports 4 port queues
	Support port priority, 802.1p priority and DSCP priority
	Support port bandwidth control, port isolation,

Specifications, image product subject to change without notice.



E111 FACTORY – THANH BINH BCA CO., LTD.

Industrial Zone – Lai Yen – Hoai Duc – Ha Noi

Tel: +8443-2181688 | Email : info@tbvision.com.vn | Website : tbvision.com.vn |

