

2 MP IR VARIFOCAL BULLET NETWORK CAMERA


SECURING YOUR LIFE

TB-I2322-PVF-60IR

Sản xuất lắp ráp tại Nhà máy E111 - BCA

Product Image Dimensions

- Dimensions: Ø 105 mm × 294.5 mm (4.1" × 11.6")
- Weight: Approx. 1500 g With package
- Material: metal
- Accessory: Adapter and junction box (included)
- Operating Conditions: -30 °C to +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)

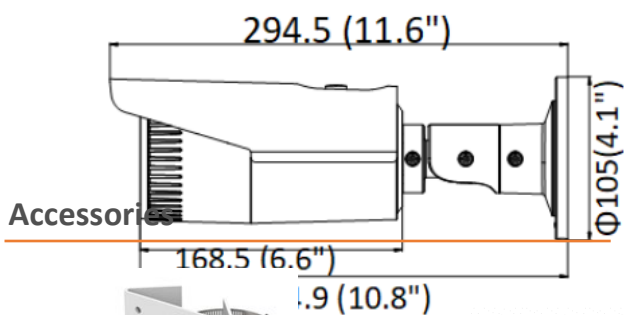

Vertical Pole Mount

Corner Mount



Ceiling mount

Features

- 1/2.7" Progressive Scan CMOS
- 1920 × 1080@30fps
- 2.7 to 13.5 mm varifocal lens
- Color: 0.01 Lux @ (F1.2, AGC ON), 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR
- H.265+, H.265, H.264+, H.264
- Three streams
- 120dB WDR
- BLC/3D DNR/ROI/HLC
- P67, IK10
- Built-in micro SD/SDHC/SDXC card slot, up to 128 GB
- 3-Axis adjustment



For more information, please visit our website



E111 FACTORY – THANH BINH BCA CO., LTD.

Industrial Zone – Lai Yen – Hoai Duc – Ha Noi

Tel: +8443-2181688 | Email : info@tbvision.com.vn | Website : tbvision.com.vn |



Specifications

CAMERA	
Image Sensor	1/2.8" progressive scan CMOS
Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s to 1/100,000 s
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0°to 360°, tilt: 0°to 90°, rotate: 0°to 360°
S/N Ratio	More than 50dB
WDR	120dB
CAMERA FEATURES	
Max. IR LEDs Length	Up to 60 m
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC / HLC /WDR(120dB)/ 3D DNR
White Balance	Auto/Sunny/Night/Outdoor/Customized
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
LENS	
Iris Type	Auto-iris
Lens Type	Varifocal lens 2.7 – 13.5 mm
Aperture	2.7 to 13.5 mm: F1.4
IMAGE	
Video Compression	1920 × 1080
Main stream	50Hz: 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 60 fps (1920 × 1080, 1280 × 960, 1280 × 720)
Audio Compression	G.711alaw/G.722.1/G.726/MP2L2/PCM/MP3
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.264/MJPEG Third Stream: H.265/H.264/MJPE
Stream	50Hz: 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 60 fps (1920 × 1080, 1280 × 960, 1280 × 720)
Image Setting	1920 × 1080
Video Bit Rate	32 Kbps to 8 Mbps

INTERFACE	
Alarm	1 input, 1 output (max. 12 VDC, 30 mA)
Audio	1 input (line in); 1 output (line out)
Ethernet Interface	1 RJ45 10 M/100 M
Edge Storage	Built-in micro SD/SDHC/SDXC slot, up to 128 GB
BNC Output	1.0 V [p-p]/75 Ω, NTSC (or PAL) composite
VCA FEATURES	
Smart Event	Line crossing detection, 1 line configurable Intrusion detection, up to 1 region configurable Unattended baggage detection, 1 region configurable Object removal detection, 1 region configurable Face detection: detects faces Scene change detection Audio exception detection
Event Detection	Motion detection, video tampering alarm, exception (network disconnected, IP address conflict, illegal login, HDD full, HDD error)
NETWORK	
Network Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, DHCP, PPPoE, UDP, IGMP, ICMP, Bonjour
Security	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS 1.2, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, TLS1.2, AES Video Encryption 128 bits.
Web Language	English, Russian, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian ...
GENERAL	
Power Supply	12 VDC ± 25% PoE: 802.3af, Type 1, Class 3
Power Consumption	12 VDC, 1.2A, max. 14.5W PoE (802.3at, 42.5V to 57V), 0.43A to 0.3A, max. 18W

*All pictures and specifications are for reference only and are subject to change without prior notice.



E111 FACTORY – THANH BINH BCA CO., LTD.

Industrial Zone – Lai Yen – Hoai Duc – Ha Noi

Tel: +8443-2181688 | Email : info@tbvision.com.vn | Website : tbvision.com.vn |

