



5 MP IR VARIFOCAL MODULE NETWORK CAMERA

SECURING YOUR LIFE

Sản xuất lắp ráp tại Nhà máy E111 - BCA


Product Image Dimensions

- Dimensions: 112.7×47.9×55.7mm
- Material: metal

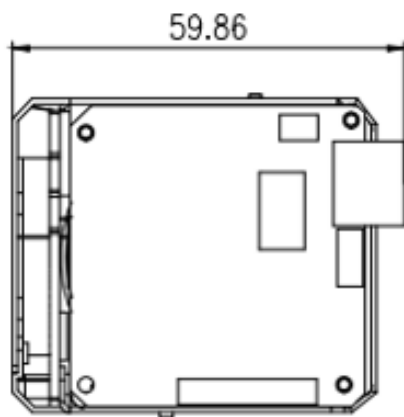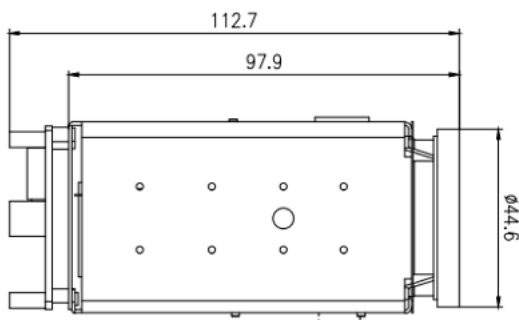

Features

- 1/2.8" Progressive Scan CMOS
- 5MP(2560×1920)@30fps
- Color: 0.01 Lux @ (F1.2, AGC ON),
- B/W: 0.001 Lux @ (F1.2, AGC ON)
- H.265+, H.265, H.264+, H.264
- Three streams
- 120dB WDR
- BLC/3D DNR/ROI/HLC

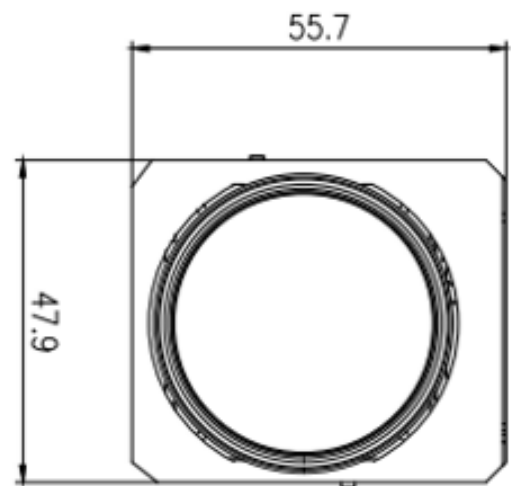

For more information, please visit
our website

*All pictures and specifications are for reference only and are subject to change without prior notice.

Specifications

| Camera | |
|----------------------|---|
| Image Sensor | 1/2.8" Progressive Scan CMOS |
| Signal System | PAL/NSTC |
| Electronic Shutter | Auto/Manual, 1/5 ~ 1/20,000s |
| Min. illumination | Color: 0.01 Lux @ (F1.2, AGC ON), BW: 0.001 Lux @ (F1.2, AGC ON) |
| S/N Ratio | 55 dB |
| Day/Night | Auto(ICR)/Day / Night/Timing |
| Wide Dynamic Range | True WDR 120 dB |
| Lens | |
| Focal Length | 5.3 ~ 159mm |
| Max. Aperture | F1.6 ~ F4.3 |
| Angle of View | H: 55°~2.3°, V: 41.6°~1.7° |
| Optical Zoom | 30x |
| Digital Zoom | 16x |
| Focus Control | Auto/Manual |
| Video | |
| Max. Resolution | 5MP(2560×1920) |
| Streaming Capability | 3 Streams |
| Stream/Frame Rate | Stream1: 2560×1920, 2048×1536, 2304×1296 1280×960 @ 20fps Stream2: D1, VGA, 640×360, CIF, QVGA @ 25/30fps Stream3: VGA, CIF, QVGA @ 25/30fps |
| Bit Rate Control | CBR/VBR |
| Bit Rate | Stream1: 100kbps~16Mbps Stream2: 10kbps~6Mbps Stream3: 10kbps~3Mbps |
| Image Adjustment | Brightness/Sharpness/Contrast/Saturation adjustable |
| White Balance | Auto/Manual |
| Noise Reduction | 2D/3D DNR |
| Image Enhancement | WDR/HLC/BLC/Anti-shake/Defog |
| Audio | |
| Audio Compression | G.711, RAW_PCM |
| Bit Rate | 8kbps(G.711), 16kps(RAW_PCM) |

| Intelligence | |
|-----------------------|---|
| Smart Function | Support face, human and vehicle detection and capture |
| Intelligent Analysis | Intrusion, Single line crossing, Double line crossing, Loitering, Wrong way, Illegal Parking (the six functions support the accurate detection of vehicle and human), People counting |
| Network | |
| Protocols | IPv4/IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP, TLS/SSL |
| Interoperability | ONVIF, SDK, CGI |
| Streaming Method | Unicast |
| Max. User Access | 10 Users |
| Web Viewer | <IE11, Chrome, Firefox, Microsoft Edge |
| Language | English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian. Default: English |
| Interface | |
| Network Interface | RJ-45, 10/100 Mbps self-adaptive Ethernet port |
| Audio Interface | 1ch Input, 1ch Output |
| Alarm Interface | 1ch Input, 1ch Output |
| RS485 | Support |
| CVBS Output | Support |
| SD Card Slot | Support, up to 256GB |
| Reset Button | Support |
| Electrical | |
| Power Supply | DC12V |
| Power Consumption | Less than 7 W |
| Operating Temperature | -20°C ~ 60°C (-4°F ~ 140 °F) |
| Operating Humidity | Less than 90% RH |
| Ingress Protection | N/A |
| Certifications | CE/FCC |
| Casing | Metal |
| Dimensions | 112.7×47.9×55.7mm (4.44×1.89×2.19 inch) |



E111 FACTORY – THANH BINH BCA CO., LTD.

Industrial Zone – Lai Yen – Hoai Duc – Ha Noi

Tel: +8443-2181688 | Email : info@tbvision.com.vn | Website : tbvision.com.vn |

